




Species name	Common name	Form	Girth (stem circumference) 1m from ground (cm)	Minimum height above soil/ media level (cm)	Alternative root packaging to containers	Comments	QTY (No.)	Approx. mature height
ORNAMENTAL SPECIES - TREES								
<i>Acer saccharinum</i>	Silver maple	EH	14-16	350	WRB	Clear stem - 200cm min	1	17-22m
<i>Alnus glutinosa</i>	Alder	EH	14-16	350	WRB	Clear stem - 200cm min	2	25m
<i>Alnus glutinosa</i>	Alder	Fthd		175	BR	1+1 transplant	1	17-22m
<i>Crataegus monogyna</i>	Hawthorn	Fthd		175	BR	1+1 transplant	4	10m
<i>Metasequoia glytostroboides</i>	Dawn Redwood	EH	14-16	500	WRB	Feathered	1	20m +
<i>Prunus avium</i>	Wild Cherry	Fthd		175	BR	1+1 transplant	2	20 m
<i>Prunus sargentii</i>	Sargent's Cherry	EH	14-16	350	WRB	Clear stem - 200cm min	3	3-7m
<i>Sorbus aucuparia</i>	Rowan	Fthd		175	BR	1+1 transplant	4	8-10m
<i>Tilia cordata</i>	Small leafed lime	EH	14-16	350	WRB	Clear stem - 200cm min	3	25m

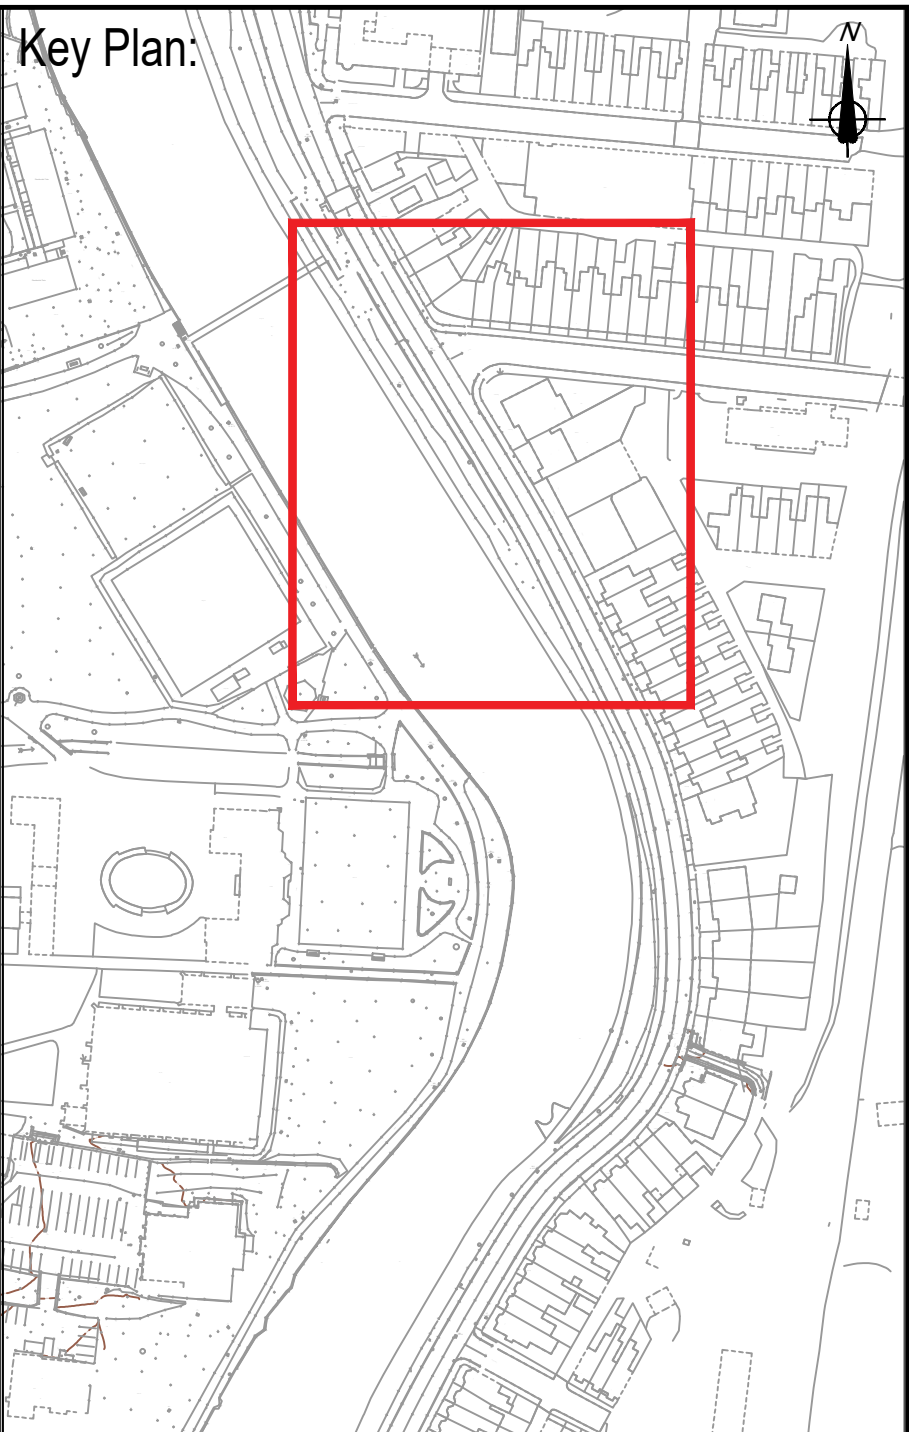

NOTES:

All proposals subject to utility surveys.

Topsoil
All trees shall have c.1m cu. of topsoil per EHS tree pit. Any topsoil imported to site to be general/multipurpose grade topsoil to BS3882.

Preparation
Use of herbicides in proximity of watercourse to be agreed with EA prior to application.

Tree pits to be pre dug and reviewed for soil condition and potential drainage concerns. Inform PM should any conditions deviate from appropriate conditions identified within specification.

Planting
All plant material to comply with BS3936:1992 and handled and planted to Handling and Establishing Landscape Plants (CPSE, 1995).
All plants to be of local or regional provenance where possible.
No substitutions of plant species, densities or sizes shall be accepted without prior approval of Landscape Architect.

EHS trees to be staked with two short stakes and biodegradable webbing, no greater than 600mm above ground level.

Bare rooted feathered transplants to be staked with single stake and biodegradable webbing, no greater than 600mm above ground level.

Root barriers
Where tree planting is proposed to within 2m of adjacent wall foundations or below ground services allow for rootbarriers to be set in place to minimum depth of 750mm. Ensure all barriers are set 25mm below finished ground levels.

Mulching
Tree pits to be mulched with 75mm thick Amenity grade bark mulch.

P01	26/08/21	EA Review and comment				GR	NG
Rev	Rev. Date	Purpose of revision				Drawn	Checked

European Union
European Regional
Development Fund

5 First Street, Manchester, M15 4GU
Tel: +44 (0) 161 235 6000. Fax: +44(0)161 235 6001
www.jacobs.com

ClientEnvironment Agency

Project

KENDAL FLOOD RISK MANAGEMENT SCHEME 1

Drawing title

Aynam Road Planning Submission
Reach G (G3)
Tree Planting Plan

Drawing status

S3

Scale	As indicated	DO NOT SCALE
Jacobs No.	B228P023	Rev
Client no.	ENV0000489C	P01

Drawing number

ENV0000489C-JAC-ZZ-4AG-DR-PL-1418

© Copyright 2021 Jacobs U.K. Limited. The concepts and information contained in this document are the property of Jacobs. Use or copying of this document in whole or in part without the written permission of Jacobs constitutes an infringement of copyright. Limitation: This drawing has been prepared on behalf of, and for the exclusive use of, Jacobs Client, and is subject to, and issued in accordance with, the provisions of the contract between Jacobs and the Client. Jacobs accepts no liability or responsibility whatsoever for, or in respect of, any use of, or reliance upon, this drawing by any third party.